



Alli



The Alli range of recessed LED luminaires is a cost-effective way of providing stylish and efficient commercial lighting.

Features including multiple linear LED boards, an opalised central optic and graduated illumination across the side panels make the Alli a very attractive proposition. Options include emergency, dimming and air-handling capabilities.

Linear microprism opalised central optic. RA: >80 as standard.
 ENEC and CE Approved.

Colour: LED Light
 Source:
 Output:
 Circuit Wattage:
 Efficacy:
 Colour Temp:
 Construction:
 IP Rating:
 Driver:
 Insulation Class:

White.
 L90B10 50,000hrs.
 3800 lm.
 36w.
 106 LL/CW
 4000K/6500K
 Steel.
 IP20.
 Electronic/DALI
 1

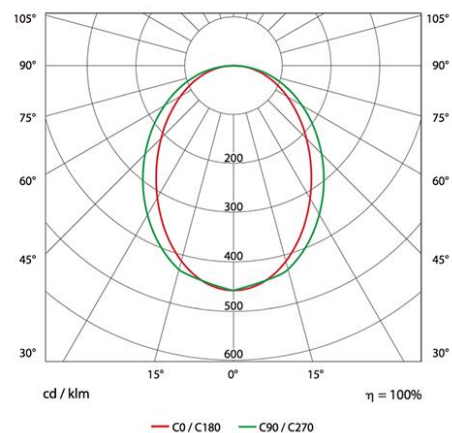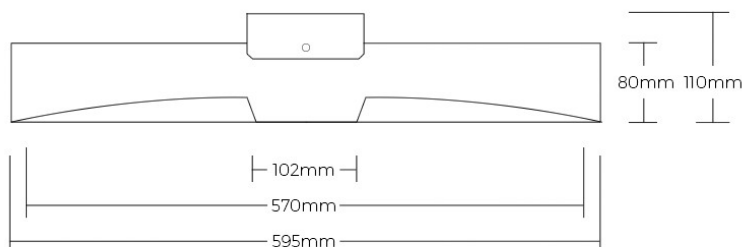

To specify choose one entry from each column, e.g. "ALL EMD 3800 840 WH" (option columns may be omitted if not required)

Name	Feature	Option	Emergency Option	Output (lm)	Colour Temp	Trim
ALL (Alli)	AH (Air Handling)	DM (Dimmable)	EM EMS (Self Test) EMD (DALI)	3800	840 865	WH (White)