



DDHC


Our DDHC range of hardwired lighting controllers offer either 1, 2 or 3 modules with 3 relays per module. The relays in each controller have both normally open and normally closed contacts.

Featuring a steel housing and removable 256k-memory module.

Colour:
Luminaire Outputs:
Connections:

Maximum Accessories:
Construction:
Power Consumption:
Load, Per Channel:
Load, Total Max:

Blue.
3 per module.
1x 2-way hardwired CAN.
1x 4-way hardwired DALI.
8 (2-wire) or 15 (4-wire).
Steel.
Off load 1.2w, Full load 3.6w.
6A.
16A.

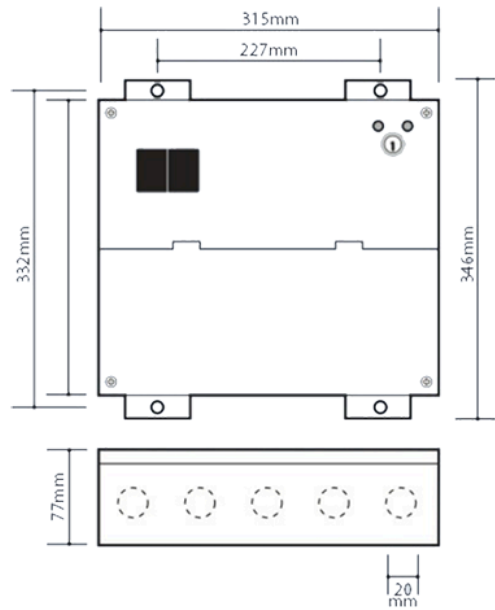

To specify use either part number "DDHC 3", "DDHC 6" or "DDHC 9"