



Atomic


The Atomic is a fire rated IP65 LED downlight which is supplied complete with bezel.

Features a multi-faceted reflector & the bezel can be supplied with a white, black, or brushed metal finish.

Fire rating FR30, 60, 90 in accordance with BS 476: Part 21: 1987, load bearing timber floor with softwood timber joists.

Colour:	White, Black, Brushed Metal.
Lumens:	775lm.
Wattage:	7.9w.
Efficacy:	95lm/W
Colour Temperature:	3000K, 4000K.
IP Rating:	IP65.
Control Gear:	Electronic, DALI, Phase-Cut Mains Dim.
Emergency option:	3 Hour, Self-Test, DALI Emergency*.

*Emergency indicators are not IP65 or Fire rated

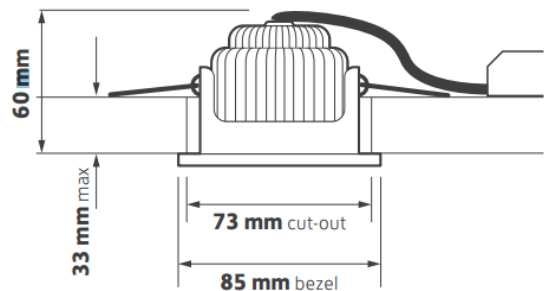

To specify choose one entry from each column below, e.g. "ATC DD E3 775 840 WH" (option columns may be omitted if not required)

Name	Driver	Option	Emergency Option	Output (lm)	Colour Temp	Trim
ATC (Atomic)	HF		E3	775	830	WH (White)
	DD (DALI)		ES3 (Self-Test)		840	BK (Black)
	MDIM (Mains Dim)		ED3 (DALI Em)			BR (Brushed Metal)