




Avante

The Avante is an LED lay-in luminaire with a UGR rating of <19 to <22 depending on the optics used, either a micro-prismatic cover or an opal diffuser.

The Avante is designed for lay-in ceiling grids and boasts an excellent light output and efficacy of over 100lm/cW and up to 120lm/cW if using the micro-prismatic optic.

The luminaire is available with DALI dimmable control gear and DALI emergency for use on our DALI controls and monitoring system.

Colour:	White.
Light source:	LED.
Optic:	Micro-prismatic, Opal.
UGR:	MP <19, OP <22.
Colour Temperature:	4000K.
CRI:	>80.
Output:	3650lm, 4320lm.
Wattage:	36W.
Efficacy:	101, 120lm/cW.
Construction:	Aluminium.
IP rating:	IP40.
Driver:	Electronic, DALI.
Emergency:	3 Hour, 3 Hour DALI EM.

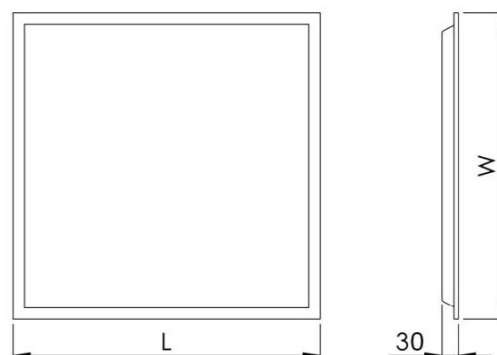

L, mm	W, mm
595	595

To specify choose one entry from each column, e.g. "AVT MP 3650 HF 840 WH" (option columns may be omitted if not required)
Please refer to above table when specifying optic and lumen output.

Name	Optic	Output	Control gear	Emergency Option	Colour Temp	Trim
AVT	MP (Micro-prismatic)	3650 (MP/OP)	HF	E3	840	WH (White)
	OP (Opal)	4320 (MP)	DD (DALI)	ED3 (DALI EM)		