




Blaze

The Blaze is a 600x600 LED flat panel which fits into 15mm or 24mm ceiling grids. The Blaze offers an excellent light output and energy efficacy of 121 LL/cW.

The Blaze is recessed as standard but can be surface mounted or suspended with the use of optional accessories.

Light source:	LED
Delivered Lumens:	4000 lm.
Circuit Wattage:	33w.
Efficacy:	121 LL/CW.
CRI:	>80
IP Rating:	IP20.
Driver:	Electronic/DALI

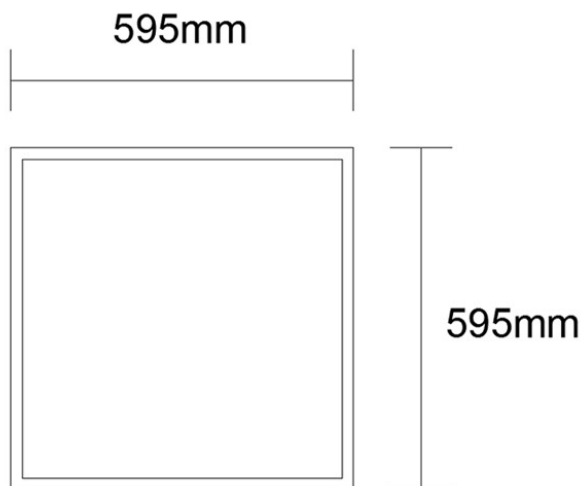

To specify choose one entry from each column, e.g. "BL DALI E3 4000" (option columns may be omitted if not required) Recessed as standard.

Name	Feature	Optional Mounting	Emergency Option	Output (lm)
BL (Blaze)	HF DALI	SF (Surface) SU (Suspended)	E3 ED3 (DALI EM)	4000