




Calibre

The Calibre is a 600x600 recessed LED luminaire IP44 rated with a low glare diffuser system constructed from steel. The Calibre is available in several lumen outputs and with a choice of 2 optical types to suit any application.

Colour:	White.
Light source:	LED.
Distribution:	Direct.
Beam Angle:	90°.
Optic:	Matt micro-prismatic, Translucent micro-prismatic.
Colour temperature:	4000K.
CRI:	>80.
Construction:	Steel.
IP rating:	IP44.
Driver:	Electronic, DALI.
Emergency:	3 Hour, 3 Hour DALI Em

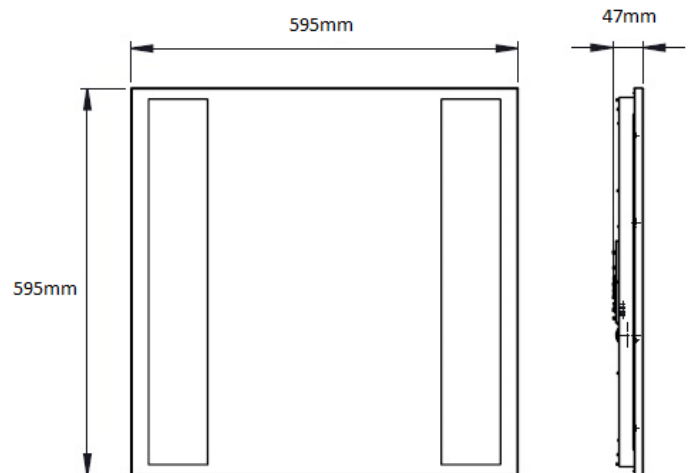

Calibre

Optic	Delivered lumens	Wattage	Efficacy
Matt micro-prismatic	3534lm	26.1w	135lm/cW
Matt micro-prismatic	4285lm	29.3w	146lm/cW
Matt micro-prismatic	5051lm	35.5w	142lm/cW
Translucent micro-prismatic	3784lm	26.1w	145lm/cW
Translucent micro-prismatic	4587lm	29.3w	156lm/cW
Translucent micro-prismatic	5407lm	35.5w	142lm/cW

To specify choose one entry from each column below, e.g. "CAB MP 2689 DD ED3 840 WH" (option columns may be omitted if not required)
Please refer to above table when specifying optic and lumen output.

Name	Optic	Output	Driver	Emergency	Colour Temp	Trim
CAB	MP (matt)	3534	HF	E3 (3 hour)	840	WH (white)
	TP (Translucent)	4285	DD (DALI Dimmable)	ED3 (DALI Em)		
		5051				
		3784				
		4587				
		5407				