




City Tile 3900

Recessed LED luminaire. Microprism diffuser with harmonious light distribution. 115 Luminaire lumens per circuit watt. Eye catching air-handling slots with 40 litres per second capability. Optional full SAS tile replacement. Aluminium body. Tridonic LED boards and control gear. RAL colour to suit surrounding tiles. 4000K LED UGR<19 RA>80.

Colour:	Custom RAL
Output:	3900 lm.
Circuit Wattage:	27 w.
Efficacy:	115 LL/CW
Colour Temp:	4000K
Construction:	Aluminium
IP Rating:	IP20
Driver:	Electronic/DALI

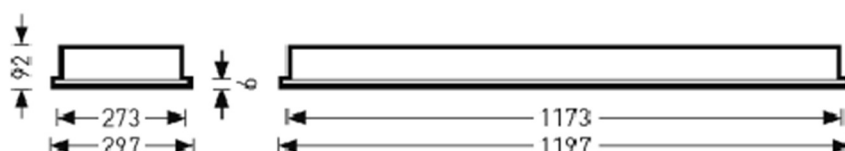

To specify choose one entry from each column, e.g. "CT 3900 EM 3900 840 RAL9003" (option columns may be omitted if not required)

Name	Feature	Option	Emergency Option	Output (lm)	Colour Temp	Trim
CT (City Tile)	3900 (Model)		EM EMS (Self Test) EMD (DALI)	3900	840	RALxxxx (RAL Colour Code)