




DDLPCM

The DDLPCM DALI controller can control up to 10 channels using the DALI protocol, and up to 16 channels if a slave unit is added.

It features single or multi-group capability and a removable 256K-memory module.

Integral emergency relay. Flame retardant ABS construction.

Colour:	Blue and Black.
Luminaire Outputs:	10x 6-pole sockets.
Data Connections:	2x RJ11 (for CAN network).
Accessory Connections:	2x RJ12 (for PIR's and Scene Plates).
Maximum Accessories:	15
Other Connections:	4-pin hardwired for DALI peripherals. 10-pin hardwired for 8 volt-free inputs.
Programming:	Handset or Laptop Bluetooth.
Construction:	ABS.
Power Consumption:	Off load 1.2w, Full load 2.2w.
Load, Per Channel:	6A.
Load, Total Max:	10A.

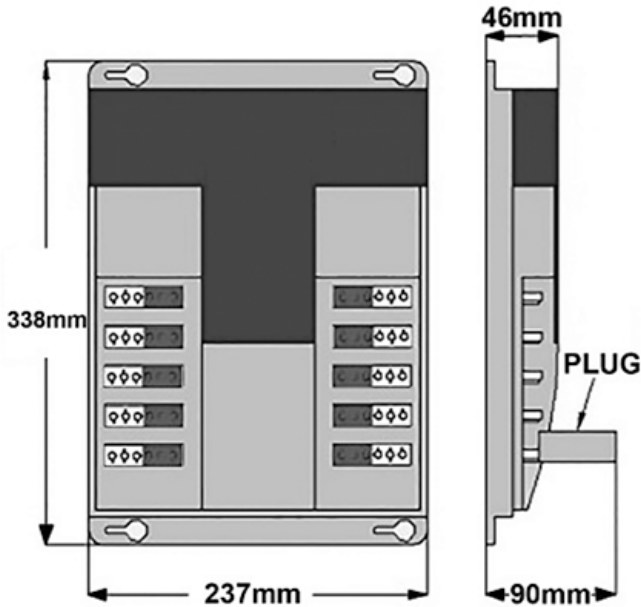

To specify use part number "DDLPCM".