





Detail Micro

A more compact version of the Detail, the Detail Micro is a recessed ceiling mounted luminaire designed for areas with long operating hours. Ideal for public and commercial applications, leisure and care home facilities.

Various beam angles are available. LED life up to 50,000 hours (L70) at 35°C ambient temperature. IP44 rated as standard, with optional IP65 rating. Colour temperature 4000K.

Trim Options: White, Black, Custom RAL.
 Delivered Lumens: 544lm (10° Only), 696lm, 948lm or 1250lm.
 Circuit Wattage: 8.8w (544), 9.2w (696), 11.4w (948) or 12.4w (1250).
 Efficacy: 61 (544), 75 (696), 71 (83) or 100 (1250) LL/CW.
 Construction: Aluminium / Polycarbonate.
 IP Rating: IP44/IP65.
 Driver: Electronic/DALI.

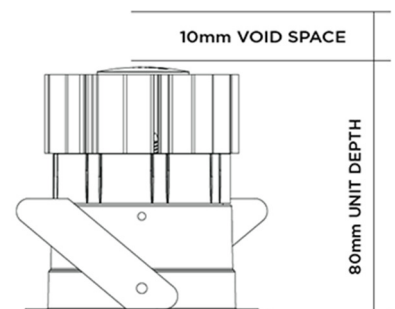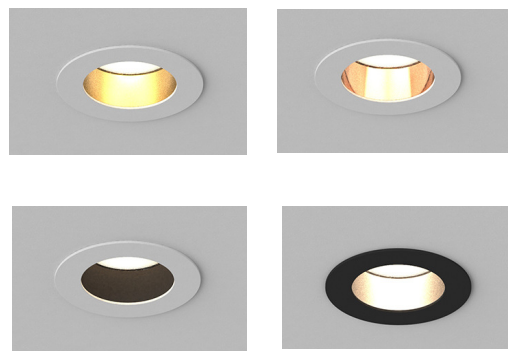

ø64mm CUT OUT
 ø42mm LENS APERTURE
 ø76mm BEZEL

To specify choose one entry from each column below, e.g. "DTC 30 DM EMS 1250 840 WH B"

Name	Beam Angle	Option	Emergency Option	Output (lm)	Colour Temp	Bezel	Baffle
DTM	10 (10 degree)	DM	E3	544	827	WH (White)	W (White)
(Detail	20 (20 degree)	(Dimmable)	EMS (Self-	696	830	BL (Black)	B (Black)
Micro)	30 (30 degree)		Test)	948	840	PB (Polished Brass)	G (Gold)
	46 (46 degree)		ED3 (DALI)	1250	850	CH (Brushed Chrome)	CS (Custom RAL)
						PC (Polished Chrome)	
						CP (Copper)	
						CR (Custom RAL)	