



# ExoWave

The ExoWave is a surface mounted luminaire for external installation on a window sill. The ExoWave has a beam angle of 8° x 170° which is specifically designed to wash light around the window frame.



The ExoWave is constructed from die-cast aluminium with a tempered safety glass with a silicone gasket and stainless-steel screws.

Colour Options  
Output:

Wattage:  
Efficacy:  
Construction:  
IP Rating:  
Driver:

Dark Grey.  
350lm (3000K).

6w.  
58 lm/w.  
Aluminium body.  
IP65.  
Electronic.

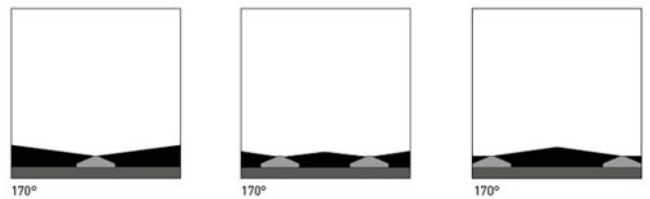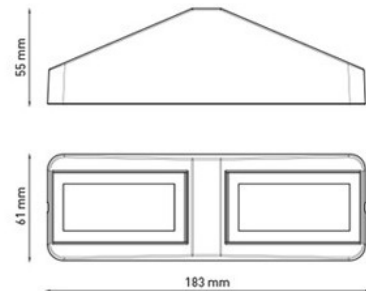

To specify choose one entry from each column, e.g. "EXW HF 350 DG"

Name	Option	Accessory	Output (lm)	Trim
EXW (ExoWave)	HF	-	350 (350lm)	DG (Dark Grey)