





# Frame

The Frame series is a combination of a stylish design element and a functional full-bodied light.

Utilising an opal diffuser these lights are particularly suitable for public areas and office spaces.

It is 90mm high and is available in two sizes in the square design and a single size in the rectangle.

Dimensions: 660 Sq., 940mm Sq. or 1220mm x 660mm.  
 Trim Options: Anodised.  
 Circuit: 660: 38w., 940: 57w, 1220: 57w.  
 Wattage: 660: 3800lm, 940: 5600lm or 1220: 5600lm.  
 Output 3000K: 660: 3930lm, 900: 5790lm or 1220: 5790lm.  
 Output 4000K: 660: 100, 940: 98.2 or 1220: 98.2 LL/CW.  
 Efficacy 3000K: 660: 103.4, 940: 101.6 or 1220: 101.6 LL/CW.  
 Efficacy 4000K: Aluminium.  
 Construction: IP40.  
 IP Rating: Electronic/DALI.  
 Driver:

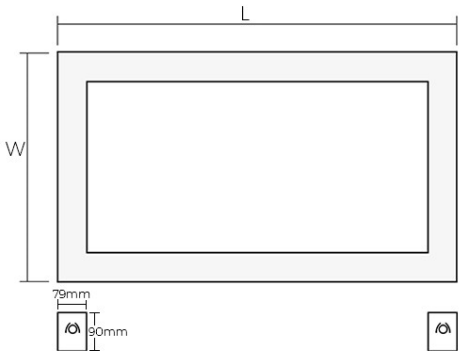

To specify choose one entry from each column below, e.g. "FR 660 D 840 AN" (option columns may be omitted if not required)

Name	Feature	Option	Emergency Option	Output (lm)	Colour Temp	Trim
FR (Frame)	660 (660mm) 940 (940mm) 1200 (1200mm)	D (Dimmable)	EM EMS (Self Test) EMD (DALI)		830 840	AN (Anodised)