




# Halo

Circular LED bulkhead luminaire ideal for ceiling/ wall mounting. Suitable for any indoor application with an IP20 rating.

The Halo luminaire is constructed using aluminum for the base and opal diffuser.

Colour:	White
LED:	1850lm, 2000lm, 2950lm, 3300lm.
Colour Temp:	3000K, 4000K.
Wattage:	25w, 35w.
Light Source	LED
Construction:	Aluminium Housing, Polycarbonate.
Driver:	HF.
Size:	D298 x H51 (25w) D400 x H67(35w)

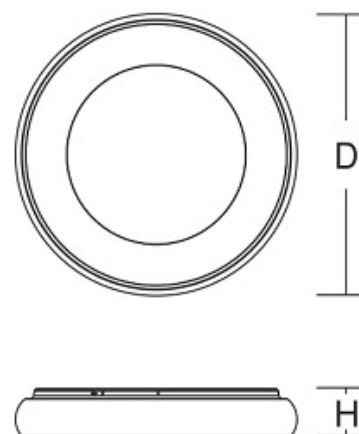

To specify choose one entry from each column below, e.g. "HLO HF 01 WH" (option columns may be omitted if not required)

Name	Feature	Option	Emergency Option	Output (lm)	Finish
HLO (Halo)	-	HF	-	01 (3000K, 1850lm, 25w) 02 (3000K, 2950lm, 35w) 03 (4000K, 2000lm, 25w) 04 (4000K, 3300lm, 35w)	WH (White)