





# Indi Round

The Indi family feature a minimalistic, modern aluminium profile and are fitted with high efficiency LED boards. They can be used separately or together in long lines and other shapes.

The luminaire can be either suspended, surface mounted or wall mounted and features an opal diffuser.

Measuring 106mm wide by 37mm deep, the Indi is available in various lengths and shapes.

Dimensions:  $\varnothing$ 1500mm,  $\varnothing$ 2010mm or  $\varnothing$ 2466mm.  
 Trim Options: White, Black or Aluminium.  
 Circuit 1500: 151w, 2010: 187w or 2466: 240w.  
 Wattage: 1500: 10070lm, 2010: 13410lm or 2466: 16470lm.  
 Output 3000K: 1500: 10550lm, 2010: 14050lm or 2466: 17250lm.  
 Output 4000K: 1500: 66.7, 2010: 71.7 or 2466: 68.6 LL/CW.  
 Efficacy 3000K: 1500: 69.9, 2010: 75.1 or 2466: 71.8 LL/CW.  
 Efficacy 4000K: Aluminium.  
 Construction: IP20.  
 IP Rating: Electronic/DALI.  
 Driver:

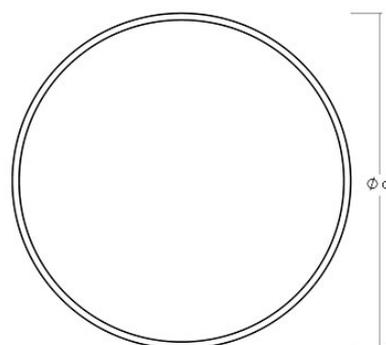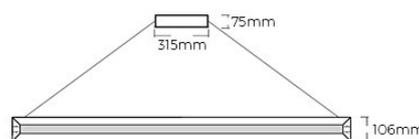

To specify choose one entry from each column below, e.g. "INRO 2010 840 AL" (option columns may be omitted if not required)

Name	Size	Option	Emergency Option	Output (lm)	Colour Temp	Trim
INRO (Indi Round)	1500 ( $\varnothing$ 1500mm)	D	EM	830	830	WH (White)
	2010 ( $\varnothing$ 2010mm)	(Dimmable)	EMS (Self Test)	840	840	BK (Black)
	2466 ( $\varnothing$ 2466mm)		EMD (DALI)			AL (Aluminium)