





Indi Straight

The Indi family feature a minimalistic, modern aluminium profile and are fitted with high efficiency LED boards. They can be used separately or together in long lines and other shapes.

The luminaire can be either suspended, surface mounted or wall mounted and features an opal diffuser.

Measuring 106mm wide by 37mm deep, the Indi is available in various lengths and shapes.

Dimensions:	564mm, 844mm, 1124mm, 1150mm, 1404mm, 1684mm, 1964mm or 2244mm.
Trim Options:	White, Black or Aluminium.
Circuit Wattage:	564: 19w, 844: 28w, 1124: 38w, 1150: 38w, 1404: 47w, 1684: 56w, 1964: 66w or 2244: 75w.
Output 3000K:	564: 1260lm, 844: 1890lm, 1124: 2510lm, 1150: 2510lm, 1404: 3140lm, 1684: 3770lm, 1964: 4400 or 2244: 5030lm.
Output 4000K:	564: 1310lm, 844: 1960lm, 1124: 2620lm, 1150: 2620lm, 1404: 3270lm, 1684: 3930lm, 1964: 4580lm or 2244: 5240lm.
Efficacy 3000K:	564: 66.3, 844: 67.5, 1124: 66, 1150: 66, 1404: 68.8, 1684: 67.3, 1964: 66.7 or 2244: 67 LL/CW.
Efficacy 4000K:	564: 68.9, 844: 70, 1124: 68.9, 1150: 68.9, 1404: 69.5, 1684: 70.1, 1964: 69.4 or 2244: 69.8 LL/CW.
Construction:	Aluminium.
IP Rating:	IP20.
Driver:	Electronic/DALI.

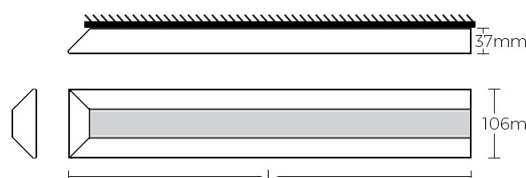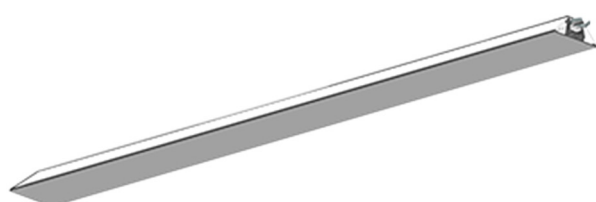

To specify choose one entry from each column below, e.g. "INST 1124 840 AL" (option columns may be omitted if not required)

Name	Size	Option	Emergency Option	Output (lm)	Colour Temp	Trim
INST (Indi Straight)	564 (564mm)	D	EM	830	830	WH (White)
	844 (844mm)	(Dimmable)	EMS (Self Test)	840	840	BK (Black)
	1124 (1124mm)		EMD (DALI)			AL (Aluminium)
	1150 (1150mm)					
	1404 (1404mm)					
	1684 (1684mm)					
	1964 (1964mm)					
	2244 (2244mm)					