




Opto Dual

Recessed LED luminaire. Direct light distribution. Ceiling mounted, designed for areas with long operating hours. Ideal for public and commercial applications, leisure and care home facilities. Semi-opal polycarbonate diffuser to minimise glare and LED spotting. LED life up to 50,000 hours (L70) at 35°C ambient temperature. IP20 rated.

Colour:	White powder coated
Output:	3500lm. 4200lm. 6200lm. 7750lm.
Circuit Wattage:	28w (3500lm). 35w (4200lm). 52w (6200lm) 65w (7750lm)
Efficacy:	125 (3500lm). 120 (4200lm). 119.2 (6200lm). 119.2 (7750lm) LL/CW
Colour Temp:	4000K
Construction:	Steel
IP Rating:	IP20
Driver:	Electronic/DALI

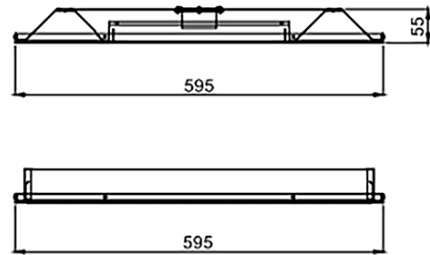

To specify choose one entry from each column below, e.g. "OP DU EM 4200 840 WH" (option columns may be omitted if not required)

Name	Feature	Option	Emergency Option	Output (lm)	Colour Temp	Trim
OP (OPTO)	DU (Dual)	DM (Dimmable)	EM EMS (Self Test) EMD (DALI)	3500 4200 6200 7750	840	WH (White)