



# Profile 60 Cell

The Profile 60 Visor is a surface or suspended LED luminaire with a unique optical system which allows for a high light output while maximizing visual comfort and minimizing glare.

The Lens system can be specified with black or white baffles to suit application.

Length:

Light Source:  
Light Distribution:

Construction:  
Diffuser:  
Colour Temp:  
Control Gear:



634mm, 1170mm

LED.  
Direct, Direct/ Indirect.

Steel.  
Lens optical system.  
3000K, 4000K.  
HF, DALI.



# Profile 60 Cell

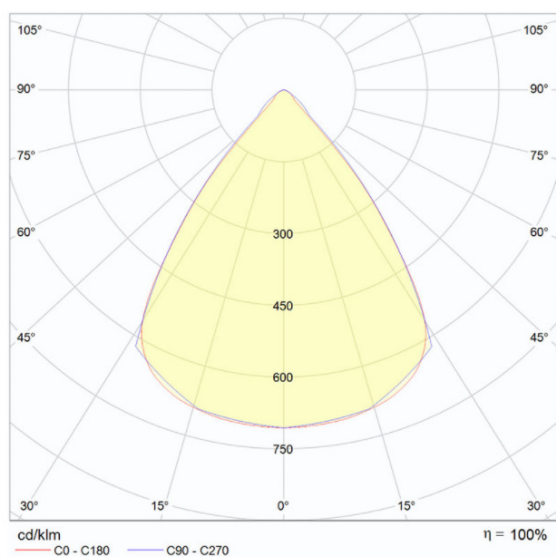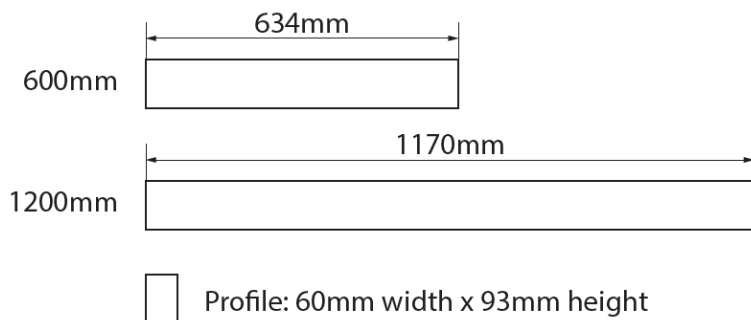

To specify choose one entry from each column below, e.g. "P60C 634-77 S DD ED3 OP 830 WH" Please note these codes are for ordering single lengths only – for any bespoke lengths or continuous runs with angles etc, please contact our sales team for a quotation.

Name	Length (mm)	Mounting	Control Gear	Emergency Option	Optic	Colour Temp	Trim
P60C	634	S (Surface)	HF	E3	BK (Black Lens optics)	830	WH (White)
	1170	SUS (Suspended)	DD (DALI)	E3S (Self-Test)	WH (White Lens Optic)	840	BK (Black)
	634-77 (Lenses in groups of 7)	SU/DI (Suspended Direct/Direct)		E3D (DALI)			RALXXX
	1170-77 (Lenses in groups of 7)						(Custom RAL)