alt.


Plaster Profile Five

The Plaster Profile Five is a range of LED luminaires which feature an extremely shallow depth of 41mm, ideal for installation in areas with restricted ceiling voids.

The Plaster Profile Five features a high performance LED light source coupled with a diffuser designed to optimize light output.

Optionally the luminaires can be installed as pendants or surface with accessories sold separately.

Light Source:	LED
Colour Temp:	2700K
Lumens:	3060lm/M (Profile Option 1), 3240lm/M (Profile Option 2), 4890lm/M (Profile Option 3)
Construction:	Aluminium

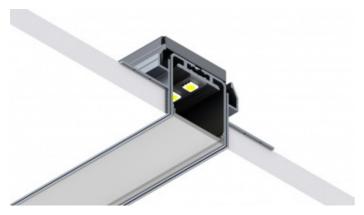


Option 1

35mm Width, 35mm Depth (52.5mm with fixing plate & mounting bracket – including gypsum ceiling)

Available in 2m or 3m lengths

Available with Opal or Prismatic diffuser






Option 2

55mm Width, 41mm Depth (52.5mm with trim-less accessory & mounting bracket - including gypsum ceiling)

Available in 2m or 3m lengths

Available with Opal or Prismatic diffuser






Option 3

116mm Width, 41mm Depth (52.5mm with trim-less accessory & mounting bracket - including gypsum ceiling)

Available in 2m or 3m lengths

Available with a Polycarbonate diffuser

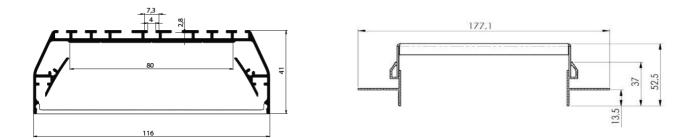

To specify choose one entry from each column below, e.g. "PR5-1 2 OP" (option columns may be omitted if not required)

Name	Option	Feature	Output (lm)	Finish
PR5-1 (Profile 5 Option 1)	2 (2m) 3 (3m)	OP (Opal) PR (Prismatic)	-	Alu (Aluminium)
PR5-2 (Profile 5 Option 2)	2 (2m) 3 (3m)	OP (Opal) PR (Prismatic)		
PR5-3 (Option 5 Option 3)	2 (2m) 3 (3m)	PC (Polycarbonate)		